


工程塑料盘 Polyamide Bowl Feeder

工程塑料振动盘具有比较低的摩擦力，可以根据客户要求特定加工，而且比较容易重复性加工。塑料盘顶盘可以分两类：等分和锥形。

Polyamide bowl feeders have low friction and can be specially machined to customer's requirements and are easily reproduced. They also have a low noise level. Stepped polyamide top bowls (SPB) and conical polyamide top bowls (CPB) are available.

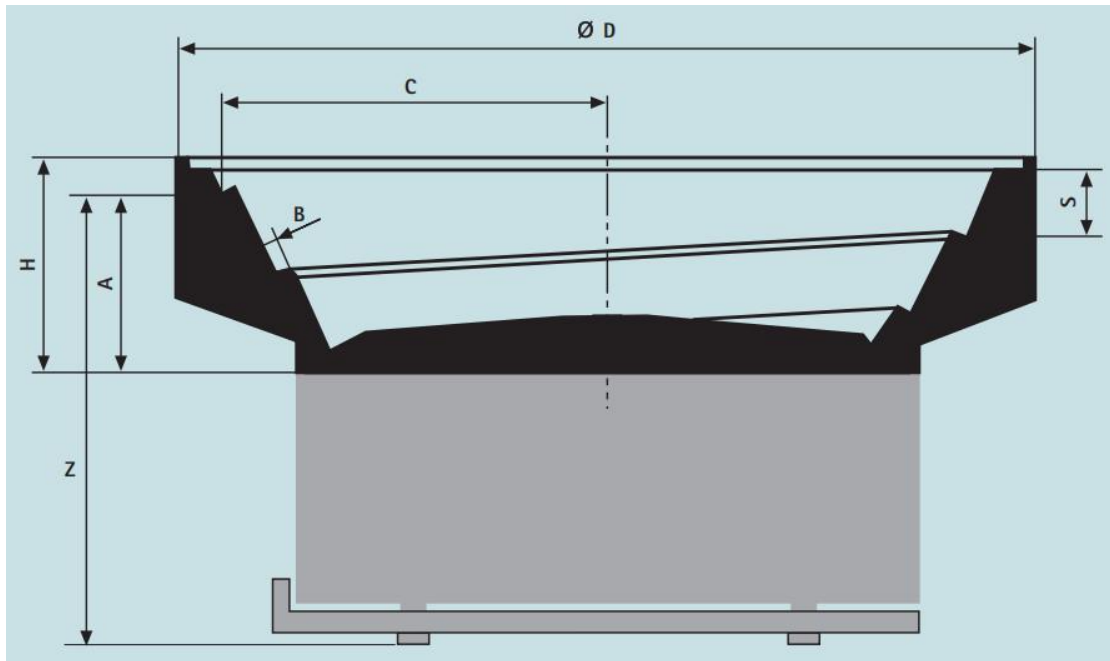

技术规格 Specification

型号 Model	SPB-H40	SPB-H60	SPB-H120	CPB-H40	CPB-H60	CPB-H120
容量 Capacity ¹ (l)	0.15	0.5	2.4	0.15	0.5	2.4
材质 Material ²	PA 6-G	PA 6-G	PA 6-G	PA 6-G	PA 6-G	PA 6-G
顶盘出口高度 A=Discharge height ³ (mm)	28-32	47-50	102-106	28-32	47-50	105-109
料道宽度 B=Width of track(mm)	2-10	2-10	2-10	2-10	2-10	2-10
出口半径 C=Discharge radius ⁴ (mm)	38-45	97-100	175-185	38-45	96-105	175-185
顶盘直径 D=Bowl diameter(mm)	120	220	400	120	220	400
顶盘高度 H=Bowl height(mm)	40	60	120	40	60	120



苏州汇利得机械有限公司
Suzhou Huilide Machine Co.,Ltd

提供排序和给料方案
Provide sorting and feeding Solutions
Add:No.5-1,Donghenggang street,
Yangchenghu,Xiangcheng,Suzhou,
China,215138
Tel:+86-512-66834790
Email:info@hldmachine.com
www.hldmachine.com

螺距 S=Track pitch(mm)	12	20	28	12	20	36
固定方式 Fixing	中心 Center	中心 Center	中心 Center	中心 Center	中心 Center	中心 Center
推荐底座 Suitable drive	PF-01/ PF-02	BF-00/ PF-04	BF-03/ BF-04	PF-01/ PF-02	BF-00/ PF-04	BF-03/ BF-04
振动盘总高度 Z=Total discharge height(mm)	100-130	200-230	310-335	100-130	200-230	310-335

1. 大容量的需要根据要求和物料设计 Larger capacities available, dependent on application and components
2. 根据不同的要求选用不同的材质 Different material available,dependent on application
3. 根据料道宽度会有变化 Different according to width of track
4. 根据料道宽度会有变化 Different according to width of track